


N20/30
FF030
RF130
BLDC
1632
FF130
FF180
RF500
RF300
RF310
094
BLDC
2035
370
2418
2430
385
2838
395
30-C
32-C
40-C
32ZY13
32ZY25
520
BLDC
520
380
555
BLDC
3640
775
38S
BLDC
38S
45S
BLDC
45S
50S
BLDC
50S
60S
BLDC
60S
80S
稳压器
同步
电机
永磁
直流电机
交流
可逆电机

ZGX45RGG(A8X87)



Dimension(mm)

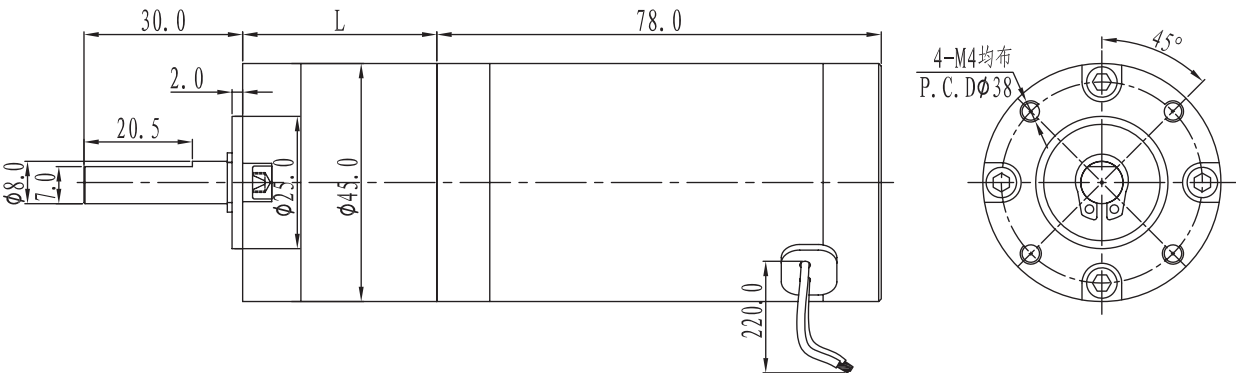

Specifications

DC Motor	Ratio	1/6	1/22.5	1/30	1/36	1/112.5	1/150	1/276	1/562.5	1/675	1/810	1/972	1/2812	1/3375	1/4050	1/4860
ZYTD-45S-R (12V-2000R)	No load (r/min)	330	89	66	55	18	13	7.2	3.53	2.95	2.46	2.05	0.7	0.59	0.49	0.41
	On load (r/min)	265	71	53	44	15	12	6.8	3.38	2.84	2.38	2	0.7	0.59	0.49	0.41
	Rated torque (kgf.cm)	1.3	4.3	5.9	7	15	15	15	20	20	20	20	30	30	30	30
ZYTD-45S-R (24V-3000R)	No load (r/min)	500	135	99	83	27	20	10.8	5.29	4.41	3.67	3.06	1.06	0.88	0.73	0.61
	On load (r/min)	390	105	78	67	23	18	10.2	5.27	4.27	3.58	3	1.06	0.88	0.73	0.61
	Rated torque (kgf.cm)	1.6	5.5	7.3	8	15	15	15	20	20	20	20	30	30	30	30
Direction	电源正极接 + 端子	CCW														

Gearbox

Reduction Ratio	L	Stages	Allowable torque	
	mm		mN.m	kgf.cm
1/6	26.7	1	392	4
1/22.5~1/36	36.7	2	784	8
1/112.5~1/276	46.7	3	1470	15
1/562.5~1/972	56.7	4	1960	20
1/2812~1/4860	66.7	5	2940	30

★Other specification can be customized.